Awning Window

078 & 425 Series

At home in either traditional or contemporary architecture, the Westal 078 Series Awning Window represents great appeal, value and versatility.

The 'hood' effect created by an Awning Window protects the interior from light rain allowing the sash to remain open and ensuring constant air flow.

Awning Window Chain Winder

Awning Window

078 & 425 Series

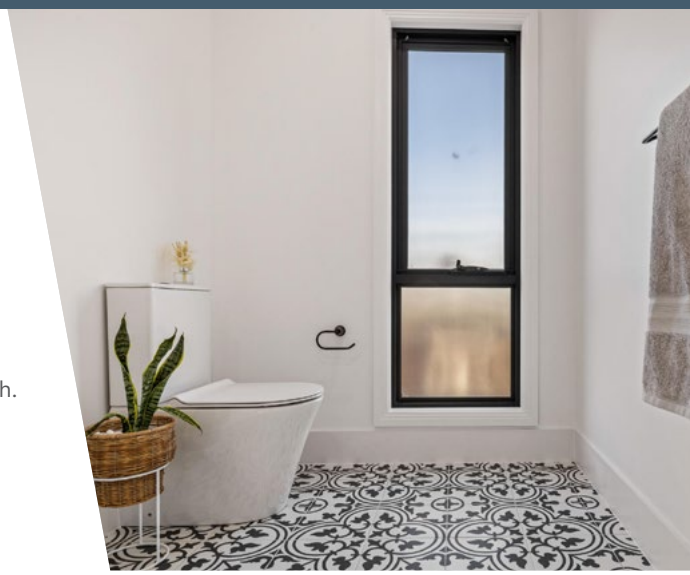

Features

- ✓ Excellent ventilation control.
- ✓ A wide sash profile creates an appealing 'picture frame' effect.
- ✓ The single glazed option features a chamfered sash profile.
- ✓ The double glazed option features a squared profile.
- ✓ A clean, external appeal.
- ✓ Tubular sash profiles and structurally glazed panels for maximum torsional strength.
- ✓ Comes with Slimline chain winder with 304 Grade extension chain.
- ✓ Provision for Fly, Barrier and Crimsafe screens (interior fixture).

Example Configurations

Awning / Fixed Lowlight

Awning

Awning / Awning

Screens

Fly Screens

Flyscreens are a practical and affordable way to cover the open area of your windows and doors, helping to keep your home free from flies and other insects. Our flyscreens are constructed using an extruded aluminium frame and standard fibreglass mesh.

Barrier Screens

Barrier screens offer an economical, intermediate level of security for your home. Our barrier screens feature black Armagrille (diamondshaped, aluminium grille), fibreglass mesh and aluminium frame and comply with the Building Code of Australia - Protection of Openable Windows requirements.

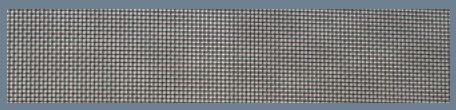

Crimsafe Screens

The integral high-tensile, stainless steel mesh of Crimsafe screens provide a superior level of safety and security to your windows and doors. They are discreet in appearance ensuring your views are unhindered and comply with the Building Code of Australia - Protection of Openable Windows requirements.

Awning Window

078 & 425 Series

Series Features

	078 Series	425 Series
Recommended Applications	Housing & residential	Housing & residential
Screening Options	Fly, Barrier & Crimsafe screens	Fly, Barrier & Crimsafe screens
Frame Width Options	75mm	102mm
Water Penetration Options	150 Pa. 300 Pa. 450 Pa.	150 Pa. 300 Pa. 450 Pa.
Glazing	Single glazed Double glazed	Single glazed Double glazed
Energy Ratings Available	Yes	Yes
Max. Acoustic Rating	Available upon request	Available upon request
Bushfire Attack Level	Tested and certified to BAL-40	Tested and certified to BAL-40
Handle Options	Keyed (supplied as standard)	Keyed (supplied as standard)
Fixing Types	Fin fix Face fix	Fin fix Face fix

Awning Window

078 & 425 Series

Standard Size Range / Configurations

Stud Opening (Frame Size with reveals + 10mm clearance)

Outer Frame Size (excludes fixing fin & reveals)

Width (mm)

Height (mm)	660 / 610	960 / 910	1060 / 1010	1560 / 1510	1860 / 1810	2160 / 2110	2460 / 2410	2760 / 2710	3060 / 3010
650 / 600	A 0606	A 0609	A 0610	AF 0615	AF 0618	AF 0621	AFA 0624	AFA 0627	AFA 0630
950 / 900	A 0906	A 0909	A 0910	AF 0915	AF 0918	AF 0921	AFA 0924	AFA 0927	AFA 0930
1050 / 1000	A 1006	A 1009	A 1010	AF 1015	AF 1018	AF 1021	AFA 1024	AFA 1027	AFA 1030
1250 / 1200	A 1206	A 1209	A 1210	AF 1215	AF 1218	AF 1221	AFA 1224	AFA 1227	AFA 1230
1550 / 1500	A 1506	A 1509	A 1510	AF 1515	AF 1518	AF 1521	AFA 1524	AFA 1527	AFA 1530
1850 / 1800	A/LL 1806	A/LL 1809	A/LL 1810	AF/LL 1815	AF/LL 1818	AF/LL 1821	AFA/LL 1824	AFA/LL 1827	AFA/LL 1830
2150 / 2100	A/LL 2106	A/LL 2109	A/LL 2110	AF/LL 2115	AF/LL 2118	AF/LL 2121	AFA/LL 2124	AFA/LL 2127	AFA/LL 2130

Windows are always viewed from outside

A = Awning F = Fixed Panel LL = Lowlite

E and OE