Sliding Window

132 & 076 Series

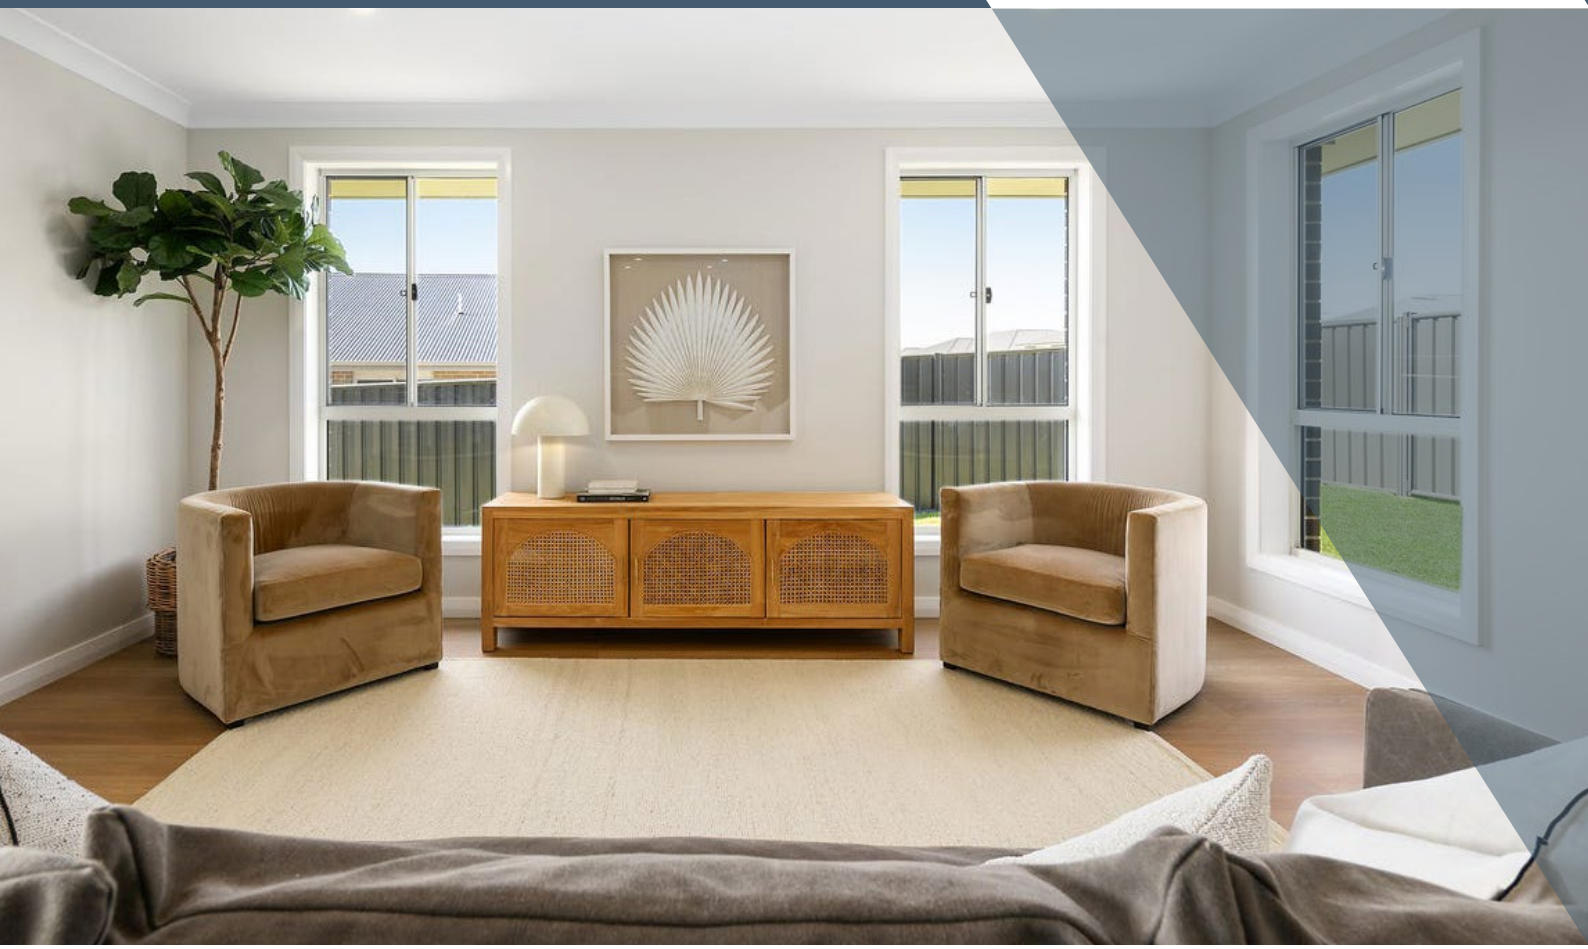

Enhance your surroundings with the contemporary style and quality features of the Westal 132 & 076 Series Sliding Window.

Clearly the favourite of all the available window types, Westal has developed a selection of Sliding Windows to ensure both individual design and performance requirements are satisfied. Our standard inclusions deliver the homeowner superior performance, functionality and value for money.

Sliding Window Cross Section

Sliding Window

132 & 076 Series

Features

- ✓ Durable, low-maintenance aluminium frame with integral fixing fin.
- ✓ Height-adjustable rollers consisting of stainless steel ball bearings and a large 16mm diameter nylon wheel ensure long-term performance and a smooth sliding action.
- ✓ A rigid sill inlay to assist with drainage and restrict the accumulation of dirt and matter in the sill cavity.
- ✓ A pivot action, self-latching handle located at the mullion for easy access and convenience.
- ✓ All sashes are independent of the perimeter frame to minimise the transfer of loads onto the glass.
- ✓ Provision for Fly, Barrier and Crimsafe screens.
- ✓ For multistorey applications, sash panels are independently glazed and can be installed /replaced from the interior.

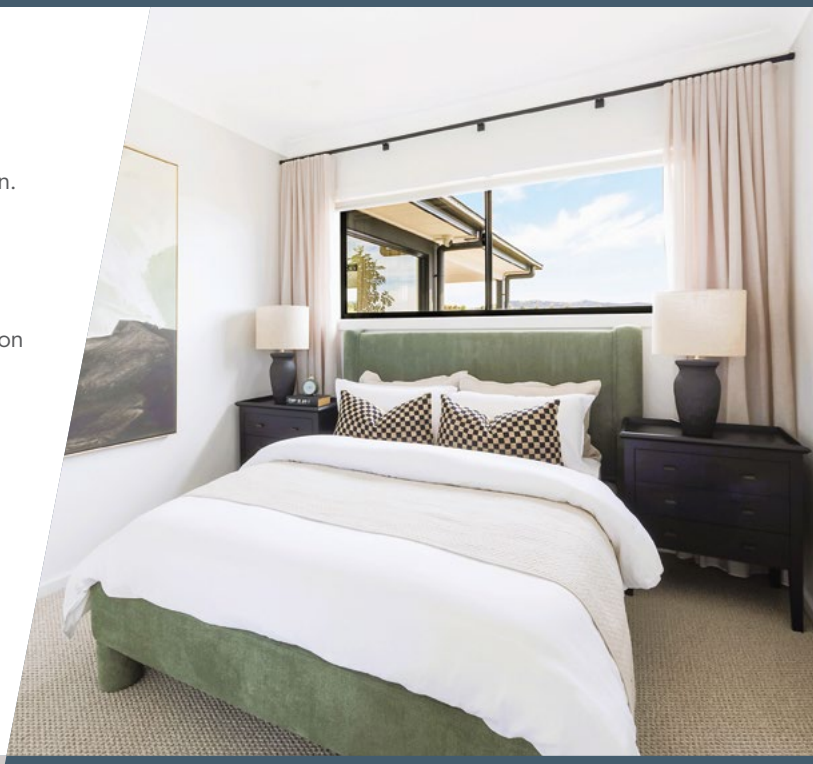

Precision designed to satisfy the homeowner's demands and Australian Standards, this window clearly offers appeal, function and structural integrity.

Recognising the importance of weatherproofing, Westal Sliding Windows incorporate fully sealed corner joints (frame), continuous weatherseals (sashes) and a range of sill options.

Your security has also been addressed with the inclusion of centrally located handles, interlocking mullions and the provision for Fly, Barrier and Crimsafe screens.

Please ask our Westal Product specialist about our 076 Series Double Glazed Sliders.

Example Configurations

Fixed Slider

Fixed Slider Slider Fixed

Slider Fixed Slider

Slider Fixed Window_Wall

Sliding Window

132 & 076 Series

Series Features

	132 Series	076 Series
Recommended Applications	Housing & low-rise residential	Housing & high rise residential
Sash Positioning	Inside slide	Inside or outside slide[1]
Screening Options	Fly, Barrier & Crimsafe screens	Fly, Barrier & Crimsafe screens
Frame Width Options	48mm 102mm	75mm
Water Penetration Options	150 Pa. 300 Pa. 450 Pa.	Inside Slide: 300 Pa. or 450 Pa. with sub-sill Outside Slide: 400, 600 or 800 Pa.
Glazing	Single glazed	Single glazed Double glazed
Energy Ratings Available	Yes	Yes
Max. Acoustic Rating	Available upon request	Available upon request
Bushfire Attack Level	Tested and certified to BAL-40	Tested and certified to BAL-40
Handle Options	Keyed (supplied as standard)	Standard latch Keyed (supplied as standard) Mortice latch - Keyed
Fixing Types	Fin fix Face fix	Fin fix Face fix

Note: The above details are intended as a guide only. Contact your Westal representative should your requirements differ to, and/or exceed these specifications.

Screens

Fly Screens

Flyscreens are a practical and affordable way to cover the open area of your windows and doors, helping to keep your home free from flies and other insects. Our flyscreens are constructed using an extruded aluminium frame and standard fibreglass mesh.

Barrier Screens

Barrier screens offer an economical, intermediate level of security for your home. Our barrier screens feature black Armagrille (diamondshaped, aluminium grille), fibreglass mesh and aluminium frame and comply with the Building Code of Australia - Protection of Openable Windows requirements.

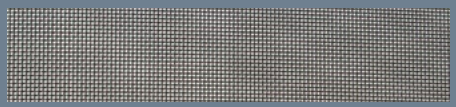

Crimsafe Screens

The integral high-tensile, stainless steel mesh of Crimsafe screens provide a superior level of safety and security to your windows and doors. They are discreet in appearance ensuring your views are unhindered and comply with the Building Code of Australia - Protection of Openable Windows requirements.

Sliding Window

132 & 076 Series

Standard Size Range / Configurations

Stud Opening (Frame Size with reveals + 10mm clearance)

Outer Frame Size (excludes fixing fin & reveals)

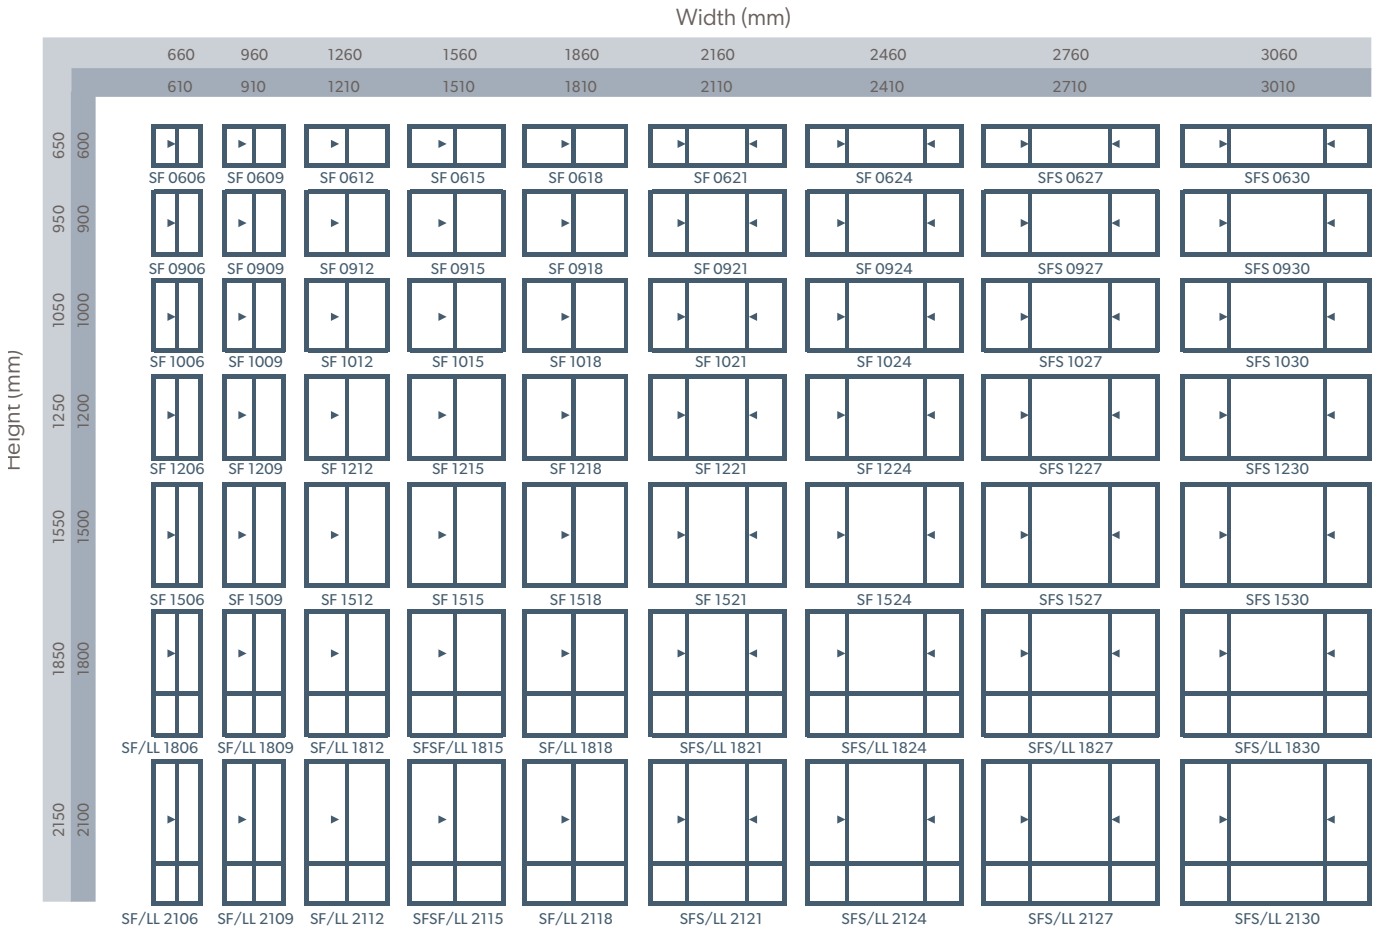

Standard Size Range

All measurements above are in millimeters and coded for ordering purposes. Height is always given first. Window sizes are overall Aluminium frame size. Stud opening with 19mm reveal (includes 10mm clearance)

When ordering please state left or right hand (SF or FS from diagram below). All handing is viewed from the outside.

Handing

S = sliding panel F = fixed panel LL = Lowlite
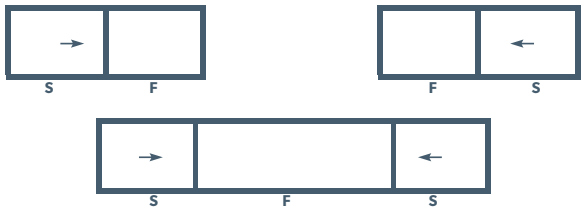
E AND OE